

Smart Positioner YT-2500 / YT2550

Product Number: YT-2500 / YT2550 (specify your requirement)

Model	Motion Type	Acting Type	Explosion Proof	Lever Type		Connection Type *	Communication*	Option	Fail Option
				Linear	Rotary				
YT-2500	L Linear	S Single	n Non-Explosion	1 10~40mm	1 M6 × 34L	1 PT	0 NONE	0 NONE	F Fail Freeze
YT-2550	R Rotary	D Double	i Ex ia IIC T5/T6	2 20~70mm	2 M6 × 63L	2 NPT	2 + HART	1 + PTM	S Fail Safe
				3 50~100mm	3 M8 × 34L				
				4 100~150mm	4 M8 × 63L	4 + PTM+L/S(Mechanical Type)	3 + L/S(Proximity Type)		
					5 NAMUR			5 + PTM+L/S(Proximity Type)	

*YT-2550 is available for NPT connection type ONLY.

*FF is available for only non-explosion model and cannot have PTM option.




YT-2500R



YT-2550R

Item · Type	YT-2500	YT-2550
Input Signal	4~20mA DC	
Supply Pressure	0.14~0.7MPa(1.4~7 bar)	
Stroke	Linear Type	10~150mm
	Rotary Type	0 ~ 90°
Impedance	Max.500Ω @ 20mA DC	
Air Connection	PT(NPT)1/4	NPT 1/4
Gauge Connection	PT(NPT)1/8	NPT 1/8
Conduit	PF1/2 (G1/2)	
Ambient Temp.	Operating Temp.	-30°C ~ 80°C (-22~176 ° F)
	Explosion Temp.	-40~60°C(T5) / -40~40°C(T6)
Linearity	±0.5% F.S.	
Hysteresis	±0.5% F.S.	
Sensitivity	±0.2% F.S.	
Repeatability	±0.3% F.S.	
Air Consumption	Fail Freeze	0.01LPM (sup=0.14MPa)
	Fail Safe	6 LPM (sup=0.14MPa)
Flow Capacity	60 LPM (sup=0.14MPa)	
Output Characteristics	Linear, EQ%, Quick Open user set (16 Point)	
Material	Aluminum Diecasting	Stainless steel 316
Enclosure	IP66	
Explosion Proof type	Ex ia IIC T5/ T6	
Weight	1.5kg (3.3lb)	2.9kg (6.4lb)

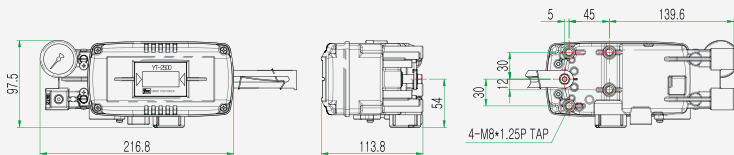

YT-2500 Smart Valve Positioner accurately controls valve stroke, according to input signal of 4-20mA being delivered from controller.

- Fail freeze function
- Near zero air consumption level
- HART communication
- Auto calibration
- PD control
- 4 buttons for local control
- LCD display
- Feedback signal
- Limit switches