

Level Measurement

Point level measurement – Vibrating switches

SITRANS LVL100

Overview



SITRANS LVL100 is a compact vibrating level switch for use in liquid and slurry applications such as overflow, high, low and demand applications, as well as pump protection. It is ideal for use in confined spaces.

Benefits

- Proven vibrating level switch technology for liquids
- Compact insertion length of 40 mm (1.57 inch) for confined space applications
- Fault monitoring for corrosion, loss of vibration, or line break to the piezo drive
- Integrated test function to confirm correct operation

Application


SITRANS LVL100 is a compact level switch designed for industrial use in all areas of process technology and can be used with liquids and slurries. With an insertion length of only 40 mm (1.57 inch), SITRANS LVL100 can be mounted in small pipes and confined space applications. It is virtually unaffected by the chemical and physical properties of the liquid. The LVL100 can be used in difficult conditions including turbulence, air bubbles, foam generation, buildup, or external vibration.

The tuning fork is piezoelectrically energized and vibrates at a mechanical resonance frequency of approximately 1 200 Hz. The vibration frequency changes when the tuning fork is covered by the medium. This change is detected by the integrated oscillator and converted into a switching command. The integrated electronics evaluate the level signal and output a switching signal to connected devices.


- Key Applications: For use in liquids and slurries, for level measurement, overflow, and dry run protection

Configuration


Horizontal mounting

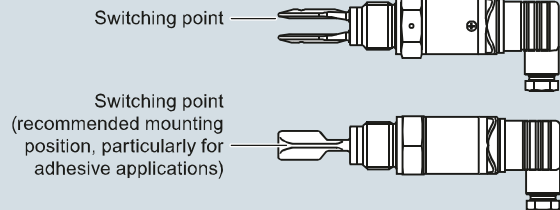


Vertical mounting

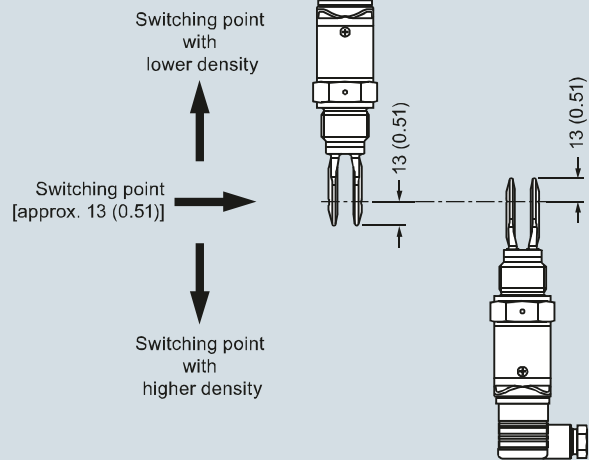

Horizontal mounting in viscous or adhesive applications



Moisture protection

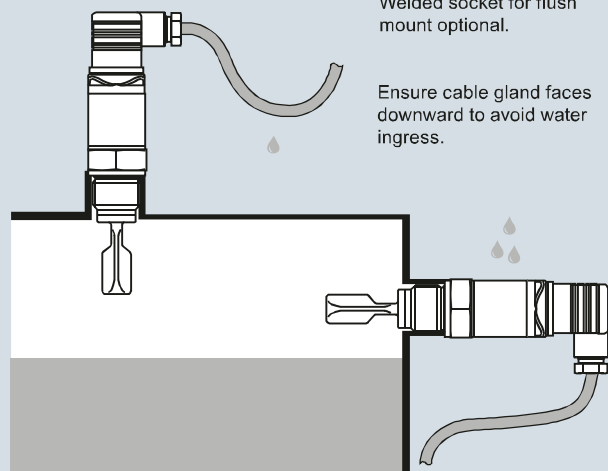

SITRANS LVL100 Installation, dimensions in mm (inch)

Level Measurement

Point level measurement – Vibrating switches

SITRANS LVL100


Technical specifications

Mode of operation	
Measuring principle	Vibrating point level switch
Input	
Measured variable	High and low and demand
Output	
Output options	Contactless electronic switch Transistor output PNP
Measuring Accuracy	
• Hysteresis	Approx. 2 mm (0.08 inch) with vertical installation
• Switching delay	Approx. 500 ms (on/off)
• Frequency	Approx. 1 200 Hz
Rated operating conditions	
Installation conditions	
• Location	Indoor/outdoor
Ambient conditions	
• Ambient temperature	-40 ... +70 °C (-40 ... +158 °F)
• Installation category	III
• Pollution degree	2
Medium conditions	
• Temperature	
- Standard	-40 ... +100 °C (-40 ... +212 °F)
- High temperature option	-40 ... +150 °C (-40 ... +302 °F)
• Pressure (vessel)	-1 ... 64 bar g (-14.5 ... 928 psi g)
• Density	0.7 ... 2.5 g/cm ³ (0.025 ... 0.09 lb/in ³)
Design	
Material	
• Enclosure	316L and Plastic PEI
• Tuning fork	316L (1.4404 or 1.4435)
• Process connection (threaded)	316L (1.4404 or 1.4435)
• Process seal	Klingersil C-4400
Process connection	
• Pipe thread, cylindrical (ISO 228 T1)	G ¾" A or G 1" A
• Pipe thread, tapered	¾" NPT or 1" NPT
• Hygienic fittings	Bolting DN 40 PN 40 Tri-clamp 1", 1½", 2" PN 10
Degree of protection	IP65/Type 4/NEMA 4 (with DIN 43650 valve plug), IP66/67 or IP68 (with M12 connector)
Conduit entry	1 x M12 [IP66/IP67 or IP68 (0.2 bar)]
Weight (housing)	250 g (9 oz)
Power supply	
Supply voltage	20 ... 253 V AC, 50/60 Hz 20 ... 253 V DC
Power consumption	1 ... 8 VA AC, approx. 1.3 W DC
Certificates and approvals	
	• Overfill protection (WHG) • Shipping approvals


Options

LVL100 threaded welded socket

G¾" A/316L



G1" A/316L



SITRANS LVL100 welded socket, dimensions in mm (inch)

Level Measurement

Point level measurement – Vibrating switches

SITRANS LVL100




Selection and Ordering data

Article No.




SITRANS LVL100

Compact vibrating level switch for use in liquid and slurry applications such as overflow, high, low, and demand applications, as well as pump protection. Ideal for use in confined spaces.

















Approvals

Without approvals  1
 Shipping approvals¹⁾  2
 Overfill protection (WHG)²⁾  3



Process temperature

Standard -40 ... +100 °C (-40 ... +212 °F)³⁾  A
 Extended -40 ... +150 °C (-40 ... +302 °F)³⁾  B
 Hygienic applications -40 ... +150 °C (-40 ... +302 °F)⁴⁾  C

Process connection

Thread G $\frac{3}{4}$ " A PN 64/316L  A 0
 Thread G $\frac{3}{4}$ " A PN 64/316L Ra< 0.8 µm  A 1
 Thread $\frac{3}{4}$ " NPT PN 64/316L  A 2
 Thread $\frac{3}{4}$ " NPT PN 64/316L Ra< 0.8 µm  A 3
 Thread G1" A PN 64/316L  A 4
 Thread G1" A PN 64/316L Ra< 0.8 µm  A 5
 Thread 1" NPT PN 64/316L  A 6
 Thread 1" NPT PN 64/316L Ra< 0.8 µm  A 7
 Tri-Clamp 1" PN 16 DIN 32676/316L Ra< 0.8 µm  A 8
 Tri-Clamp 1½" PN 16 DIN 32676/316L Ra< 0.8 µm  B 0
 Tri-Clamp 2" PN 16 DIN 32676/316L Ra< 0.8 µm  B 1
 Bolting DN25 PN 40 DIN 11851/316L Ra< 0.8 µm  B 2
 Bolting DN40 PN 40 DIN 11851/316L Ra< 0.8 µm  B 3
 Bolting DN50 PN 25 DIN 11851/316L Ra< 0.8 µm  B 4
 SMS DN38 PN 6 316L Ra< 0.8 µm  B 5
 Hygienic fitting with compression nut F40 PN 25/316L Ra< 0.8 µm  B 6





Electronics

Contactless electronic switch 20 ... 250 V AC/DC⁵⁾  1
 Transistor output PNP 10 ... 55 V DC  2



Housing

316L  1

Electrical connection/Protection

M12x1/IP67  A
 According to DIN 43650 including plug/IP65  B
 Acc. to DIN 43650 incl. plug with QuickOn connection/IP65  C
 M12x1 incl. 5 m cable/IP68 (0.2 bar)  D

- 1) Available with process temperature option A only
 2) Available with electronics option 2 only
 3) Available with process connection A0, A2, A4, and A6 only
 4) Available with process connection A1, A3, A5, and A7 ... B6 only
 5) Available with electrical connection/protection option B and C only





 We can offer shorter delivery times for configurations designated with the Quick Ship Symbol . For details see page 9/5 in the appendix.

Selection and Ordering data

Order code

Further designs

Please add "-Z" to Article No. and specify Order code(s).





Cleaning including certificate (oil, grease and silicone free)  W01
 Identification Label, foil laser marking  Y16
 Acceptance test certificate 3.1 for instrument  C12
 Acceptance test Certificate 2.2 for material EN10204  C15

Additional Operating Instructions

LVL100 (Contactless electronic switch)







• English  7ML1998-5KN01
 • French  7ML1998-5KN11
 • Spanish  7ML1998-5KN21
 • German  7ML1998-5KN31



LVL100 (Transistor PNP)

• English  7ML1998-5KP01
 • French  7ML1998-5KP11
 • Spanish  7ML1998-5KP21
 • German  7ML1998-5KP31
 This device is shipped with the Siemens Milltronics manual DVD containing the Operating Instructions library.

Spare Parts


LVL100 Threaded Welded Socket

G $\frac{3}{4}$ " A/316L with FKM Seal  7ML1930-1EE
 G1" A/316L with FKM Seal  7ML1930-1EF
 M27x1.5/316L with FKM Seal  7ML1930-1EG
 G $\frac{3}{4}$ " A/316L with EPDM Seal  7ML1930-1EH
 G1" A/316L with EPDM Seal  7ML1930-1EJ
 M27x1.5/316L with EPDM Seal  7ML1930-1EK


 We can offer shorter delivery times for configurations designated with the Quick Ship Symbol . For details see page 9/5 in the appendix.

Characteristic curves

Ambient temperature to process temperature dependency (standard version)

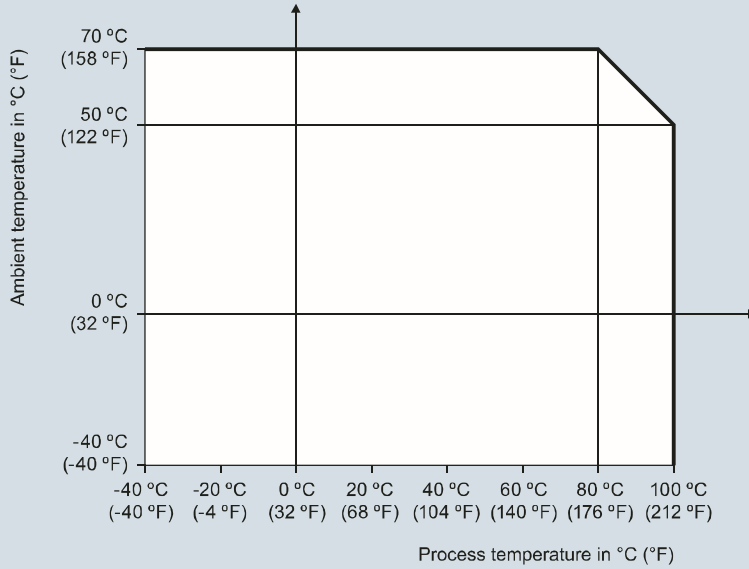

Ambient temperature to process temperature dependency (high temperature version)

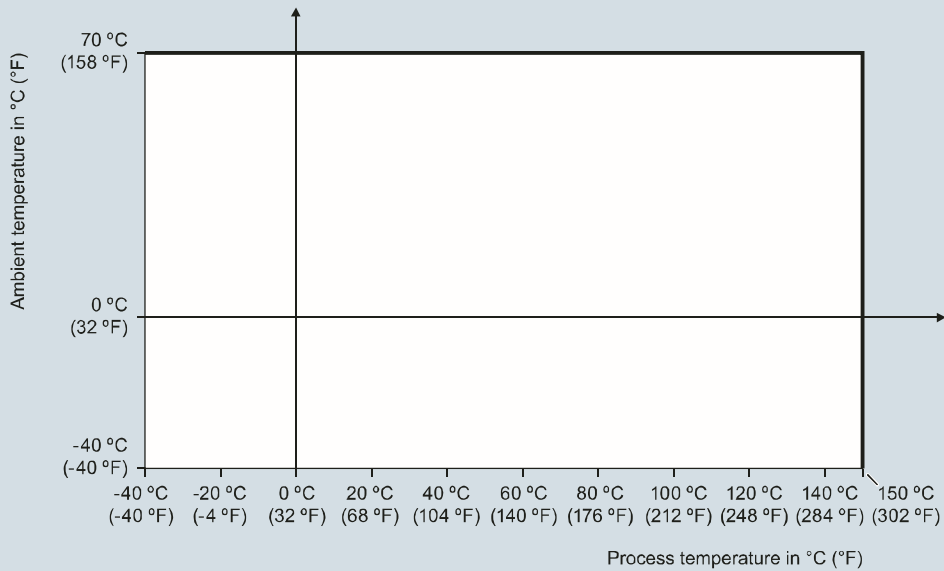

SITRANS LVL100 Ambient Temperature/Process Temperature derating curves

Level Measurement


Point level measurement – Vibrating switches

SITRANS LVL100

Dimensional drawings

4

SITRANS LVL100 (standard)

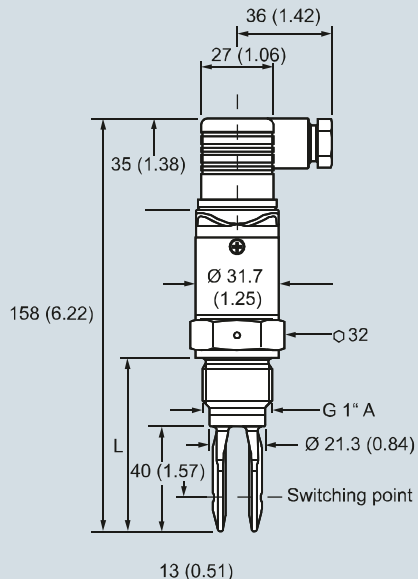


L =
 Length with G 3/4" A, 3/4" NPT: 66 (2.6)
 Length with G 1" A, 1" NPT: 69 (2.7)

SITRANS LVL100 (extended high temperature)


Thread G 3/4" A, G 1 inch A (DIN ISO 228/1),
 3/4" NPT or 1" NPT (valve plug DIN 43650)

Tri-clamp (valve plug DIN 43650)

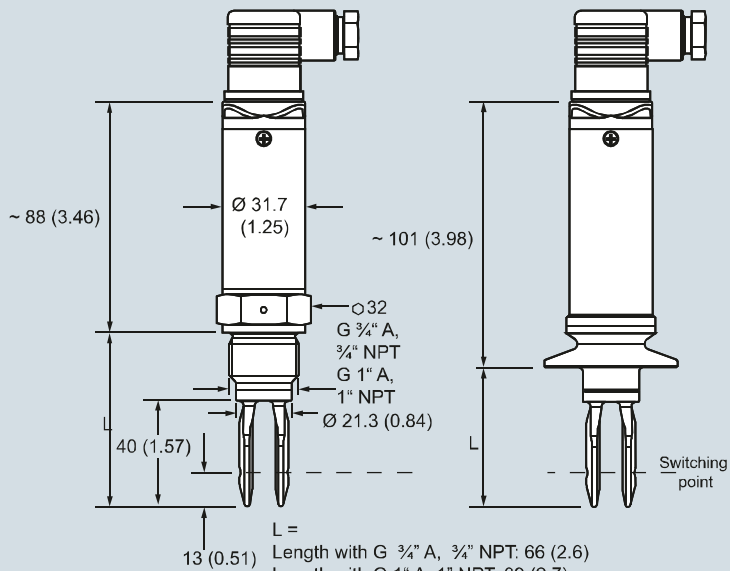

L =
 Length with G 3/4" A, 3/4" NPT: 66 (2.6)
 Length with G 1" A, 1" NPT: 69 (2.7)
 Length with Tri-clamp: 53 (2.1)

SITRANS LVL100 (standard with M12 connector)

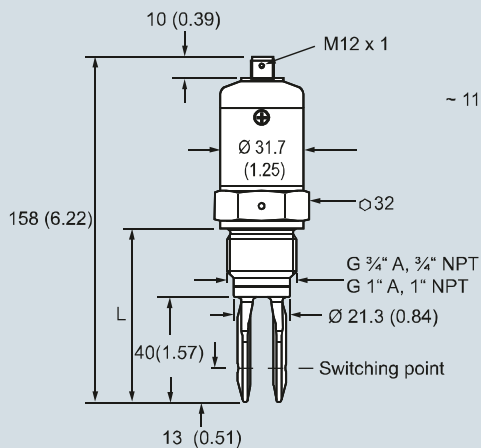


L =
 Length with G 3/4" A, 3/4" NPT: 66 (2.6)
 Length with G 1" A, 1" NPT: 69 (2.7)

SITRANS LVL100 (extended, high temperature)

Bolting DIN 11851 (valve plug DIN 43650)

SMS 1145 (valve plug DIN 43650)

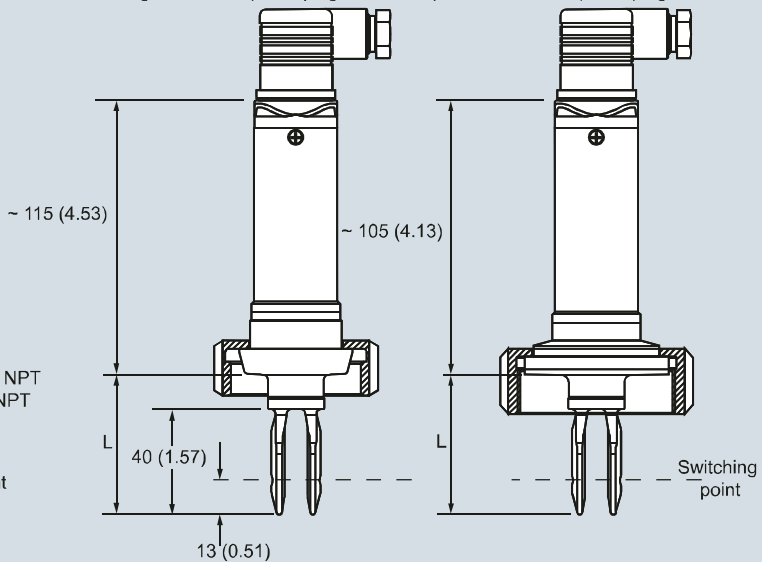

L =
 Length with bolting: 53 (2.1)
 Length with SMS 1145: 53 (2)


SITRANS LVL100, dimensions in mm (inch)

Level Measurement

Point level measurement – Vibrating switches

SITRANS LVL100

Schematics

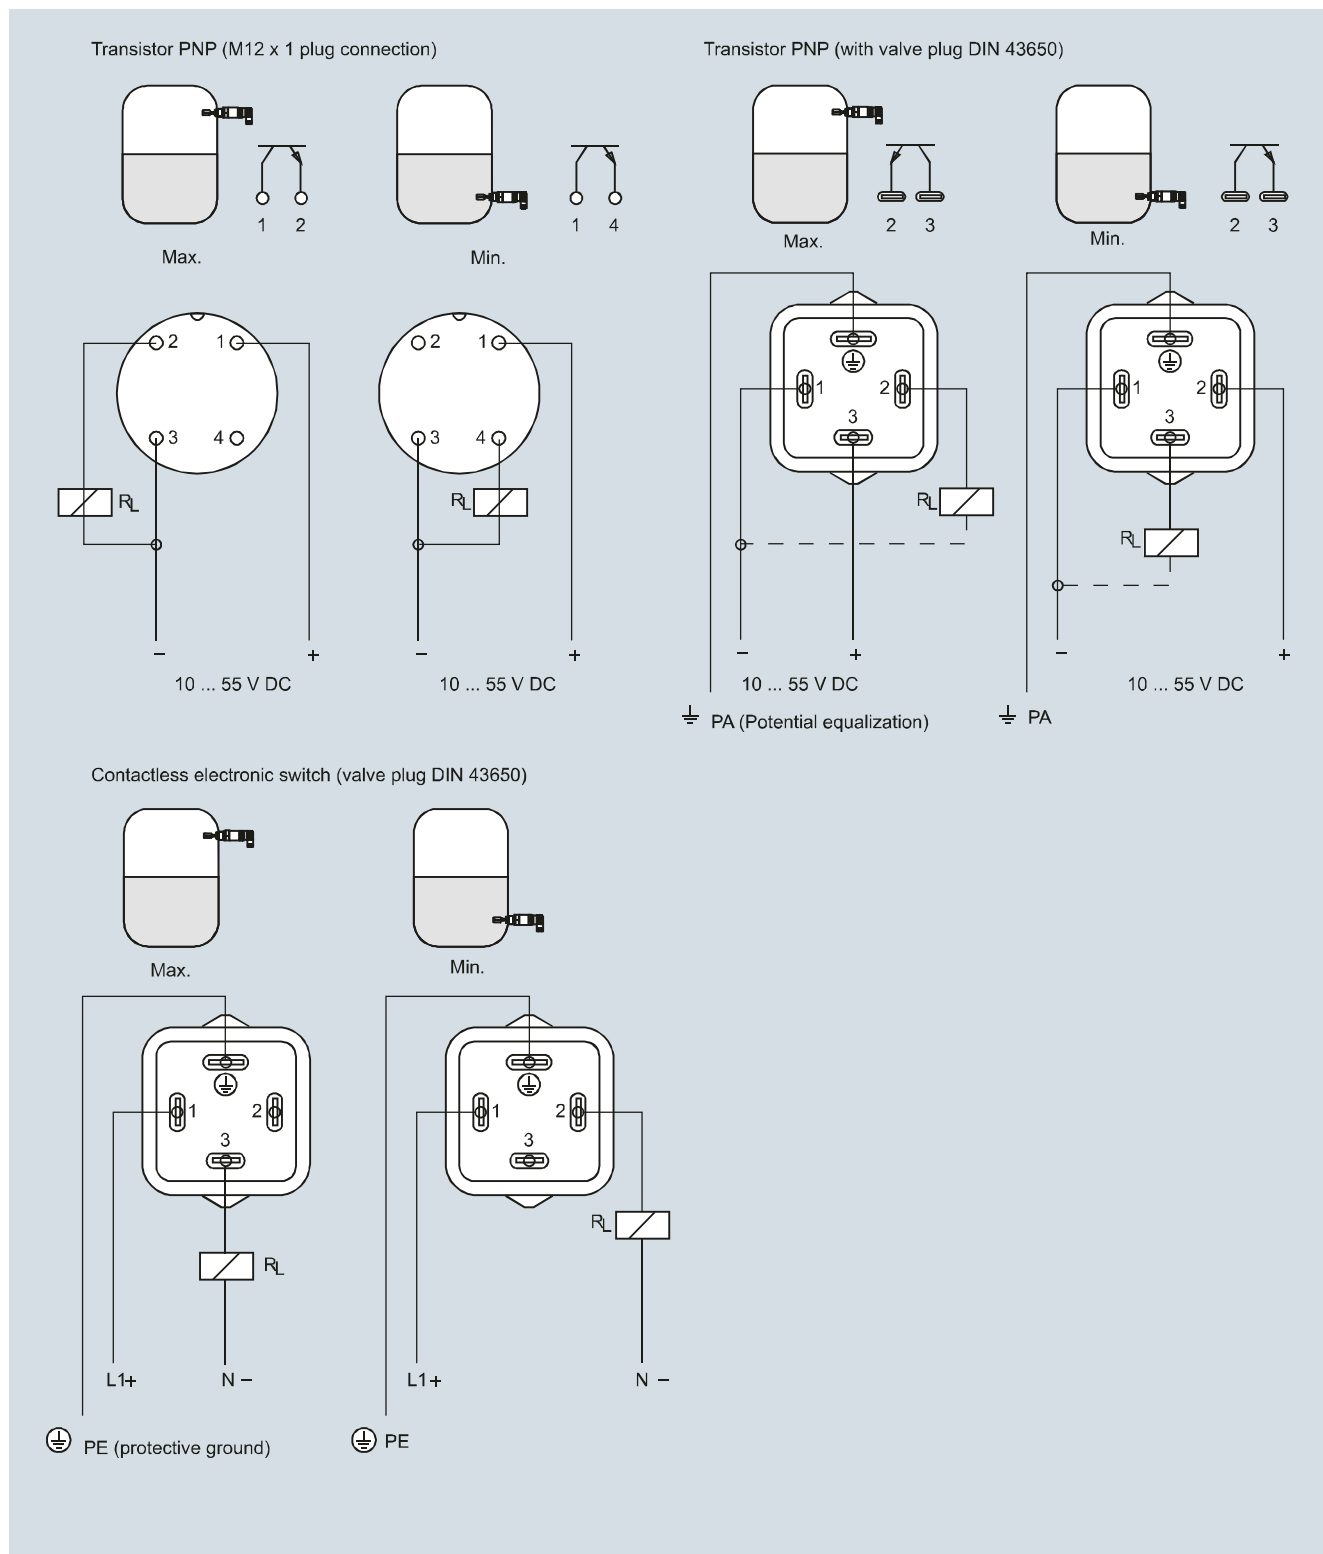

SITRANS LVL100, connections

4